


TECHNICAL DATA SHEET

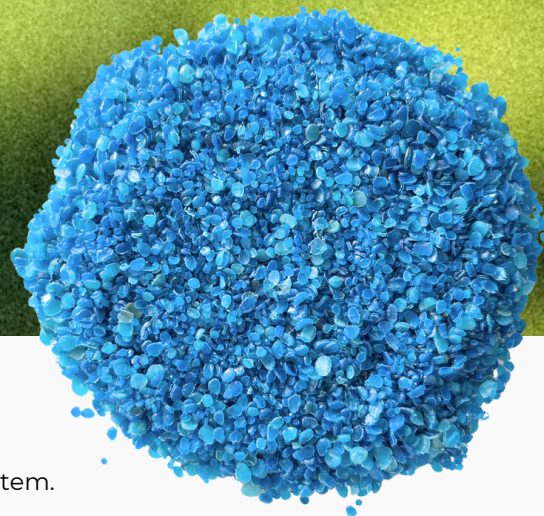

RP05 ASEPTIC BAG LDPE/LLDPE

Recycled and decontaminated LDPE/LLDPE with Fych Decontamination system.

CHARACTERISTICS:

Quality, final applications:	Blown film, cast film, Injection molding.
CAS:	9002-88-4
Origin:	Post-consumer
Form:	Pellets

COLOR



Blue

TECHNICAL DATA:

Properties	Test Method	Units	Value
Composition	DSC	%	PLDPE: 74-78 LLDPE: 22-26
Density	UNE-EN ISO 1183-1:2019	g/cm ³	0,94-0,95
Melt Flow Index	ISO 1133 (190°C, 2,16 kg)	g/10 min	0.25-0.30
Ash content	UNE-EN ISO 3451-1:2020	%	0.3-0.5
Volatile content	UNE-EN 12099:1997	%	-

Disclaimer:

All the information about chemical and physical properties consists of values measured in tests should only be regarded as being advisory and does not absolve the customers from doing their own full-scale tests to determine the suitability of the material for the intended applications. Customers assume all risk and liability arising from your use of the information and/ or use or handling of any product. Figures are indicative and can vary depending on the specific parameters selected and the production site.